

READ INSTRUCTIONS PRIOR TO INSTALLATION OF EQUIPMENT OR YOU MAY VOID THE WARRANTY!

LITETOUCH HUMID LOCATION BACKBOX INSTALLATION

The LiteTouch Humid Location Backbox provides product protection from mild moisture conditions.

Note: The Humid Location Backbox is not intended for direct water contact.

PRE-INSTALLATION

1. Identify the installation location of the LiteTouch Keypad and Humid Location BackBox placement.

Note: Dimensions 6.5" H x 4" W x 2.3" D (See Fig. 3)

2. With the included gasket mount, mark the four mounting holes on the mounting surface. The gasket mount should be used as a template by placing it in the desired location on mounting surface. (See Fig. 1)
3. Utilize mounting hardware specific for surface type (# 10 MAX Diameter) following the manufactures directions to prepare mounting location.

Note: #10 MAX Diameter mounting hardware is not provided.

HUMID LOCATION BACKBOX INSTALLATION

1. With mounting hardware, mount Humid Location Backbox and gasket mount. The gasket is installed between wall surface and rear of Humid Location Backbox. (See Fig. 1)

KEYPAD INSTALLATION

1. With station wire pulled into the mounted Humid Location BackBox, connect low voltage station wire to LiteTouch keypad.
2. Ensure keypad is properly addressed and set to desired LED intensity and color.
3. Mount keypad with provided mounting screws. (See Fig. 2)

Figure 1: Installation of Humid Location Backbox

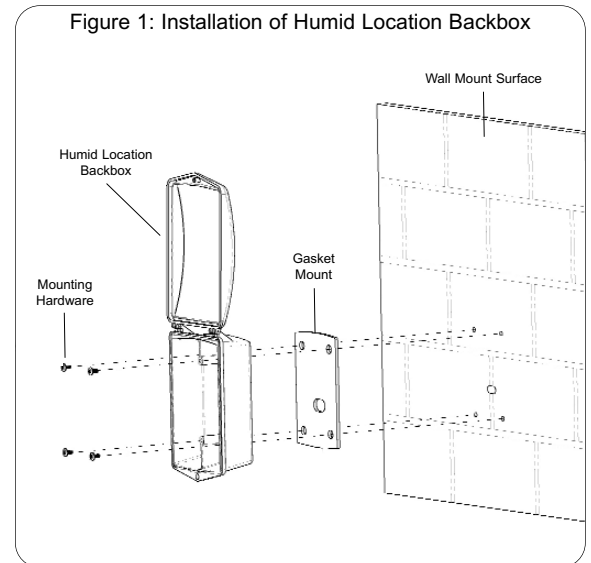


Figure 2: Installation of Keypad into Humid Location

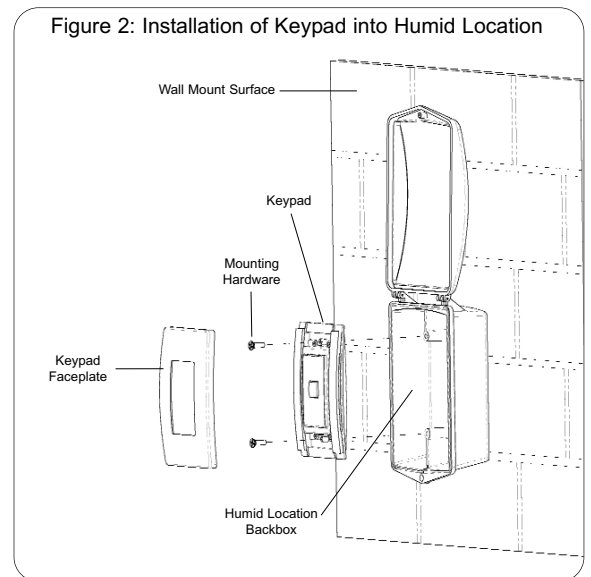


Figure 3: Humid Location Backbox Dimensions

