SAVANT

Dual 20 Amp Power Module (Supports QO Style Load Centers) Quick Reference and Installation Guide

Box Contents

- (1) Dual 20 Amp Power Module
 - GPM-QP2R20120-21 QO™ w/Plug-on Neutral -or-
 - GPM-Q2R20120-21 QO™ w/Pigtail
- (1) Product Information and Regulatory Insert (009-1950)
- (1) Quick Reference and Installation Guide (this document)

Specifications

Environmental	
Temperature	-22° to +122° F (-30° to +50° C)
Humidity	Up to 90% Relative Humidity (non-condensing)
Location	Indoor use unless installed in a NEMA 3R rated enclosure.

Dimensions and Weights				
	Length	Width	Height	Weight
Module	4.97 in.	1.45 in.	2.60 in.	.5 lbs
(QO)	(12.63 cm)	(3.68 cm)	(6.61 cm)	(.23 kg)
Shipping	7.50 in.	4.30 in.	1.71 in.	1.0 lbs.
	(19.05 cm)	(10.92 cm)	(4.34 cm)	(.45 kg)

(13.03 CII	1) (10.32 cm) (4.34 cm) (.43 kg)		
Power			
Input Power (powers the module)	120V AC (+/- 10%) @ 60 Hz, 0.1A (max)		
Input Power (from feeder breaker)	120V AC @ max power load		
Load Power	2400VA max per channel (20A resistive load / 1 HP max per channel)		
Features of Automatic Action	Type 1.B action		
Standards			

0 (011101011010			
Wireless	Bluetooth 5 Low Energy (BLE)		
vvii eiess	- 2.4 GHz radio frequency		

Regulatory			
	FCC Part 15	UL	ICES 003
Safety and Emissions	FC	CUL US	

Contains IC: 10798A-QP2R20120 Contains FCC ID: PUU-QP2R20120 RoHS Compliant

Recommended Load Center Types


Refer to the Features section to the right for compatibility.

Supported Load Types			
Standard Configuration Relay On/Off type loads (home automation)			
Electrical and Safety Characteristics			
Screw Tighten Torque	3.0 Nm		
Wire Type	Copper (Cu) only		
Pollution Degree	2		
Purpose of Control	Operating Control, Smart Relay Control Module or equivalent		
Software	Class A		
Impulse Voltage	2500V		
Construction of Control			

da Vinci 10.1.1

Independently mounted for flush mounting

Descriptions



Multi-Page LCD screen that can display the following:



- Power draw and energy usage at each output.
- Firmware, Mac Address, and Regulatory Info.
- UID of the Host that the module is communicating with.
- Real-time Bluetooth status connectivity icon.



Manual Load Switches - Toggle to the ON position to switch the load on. Toggle to AUTO for normal operation. Switch A controls output A, Switch B controls output B.

PAIR Button - The PAIR button is a multi-use button. The duration that the button is pressed and held determines the function that gets initiated:



Press and Release - Cycles through the screens available on the LCD (POWER > ENERGY > INFO 1 > INFO 2).

Press and hold - Press and hold for 2 second to put the module into pairing mode. Press and hold for 5 seconds to



Input Power Connections - Connect the outputs from two feeder breakers to inputs A and B on the module. See the Wiring section below.



Output Power Connections - Connect output A and output B to separate loads. See the Wiring section below.



120V AC Connection - Plugs onto the 120V AC bus bar in the electrical panel. This connection powers the module.

Neutral - The power module's model number indicates the type of neutral connection:

Plug-On Neutral - Positioned on the bottom of the module is a neutral clip that plugs directly onto the neutral bar.



Pigtail Neutral - A neutral wire protrudes from the module's rear and is wired to the neutral bar.



TIP! Modules with an external neutral wire (pigtail) are supported in Plug-On neutral type electrical panels. In these cases, the pigtail neutral wire must be connected directly to the neutral bar

Features

- Control capability for loads up to 2400VA per channel.
- The GPM-QP2R20120-21 and GPM-Q2R20120-21 power modules are compatible with Schneider/Electric Square $\mathsf{D}^{\scriptscriptstyle\mathsf{TM}}$ QO $^{\scriptscriptstyle\mathsf{TM}}$ load centers.
- Dynamic management of loads.
- Built-in energy monitoring; +/- .5% revenue grade accuracy / 1 sec sample time.
- Communicates over the air using Bluetooth Low Energy (BLE).
- The manual load switches, on the front panel can toggle power to the outputs On and Off.
- Color LCD display for easy identification and load status.

Minimum Supported Release

Open Type

Savant OS

Important Information

- The breaker(s) feeding the module should not be larger than 20 amps.
- Each relay output can switch up to 20 amps.
- To determine the number of spaces needed in the electrical panel, add the number of spaces required for the feeder breaker(s) to the number of spaces needed for the module.
 - A single pole circuit breaker requires one space.
 - A 2-pole circuit breaker requires two spaces.
 - Each GPM-QP2R20120-21 and GPM-Q2R20120-21 power module requires two spaces.
- Savant recommends not connecting any mission-critical loads such as medical devices to this relay module.

Branch Circuit Minimum Size of Conductors (General circuit wiring, Copper Conductors)					
15A	20A	30A	40A	50A	60A
#14 AWG	#12 AWG	#10 AWG	#8 AWG	#6 AWG	#4 AWG

NOTE: This wiring requirement was based on the National Electric Code (NEC) (ANSI/NFPA70), Canadian Electric Code, Part 1 (CEC), and local codes Minimum Size of Conductors.



ELECTRIC SHOCK! The 120V AC, 60 Hz source poses an electrical shock hazard that has the potential to cause serious injury to installers and end users.



CAUTION! Risk of Electric Shock - More than one disconnect switch may be required to de-energize the device before servicing.



IMPORTANT! A licensed electrician is required to install any of Savant's power modules.

Installation into Breaker Panel

Savant recommends making wire connections with the power module before it is installed into the panel so that wire connections can more easily be checked. Once installed, electrician should re-torque to ensure screws are tight. Refer to the Wiring section to make the appropriate connections.

- Switch off the electrical panels main breaker to remove power from the panel.
- 2. Position and install a feeder breaker into a slot in the panel. Press firmly until the breaker is fully seated onto the appropriate bus
- 3. Install a second feeder breaker into the panel. Typically the feeder breakers are positioned alongside each other but don't have to be.
- 4. Position and install the 20 Amp Power Module into the electrical panel. Press firmly until fully seated onto the appropriate bus bars. This module is typically installed alongside the feeder breakers installed in steps 2 and 3 but doesn't need to be.




HELPFUL! A 20A power module fills two slots in the electrical panel but connects to just one phase (120V AC). This connection powers the module.

5. Refer to the Wiring section to make the appropriate connections.




IMPORTANT NOTES!:

- A licensed electrician is required to install any Savant power module.
- When making connections, an electrician must confirm that all wires sit cleanly on one side of the terminal screw.
- Stranded wire must be neatly twisted to ensure proper connection. Savant also recommends using a UL-approved ferrule.

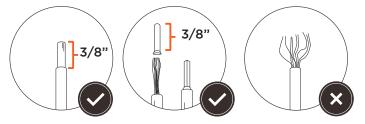

System Overview

The complete system is shown below for reference. The controller (PBC, Director, or Director Lite) communicates with the power module over Bluetooth and communicates with the Savant Host over Ethernet.

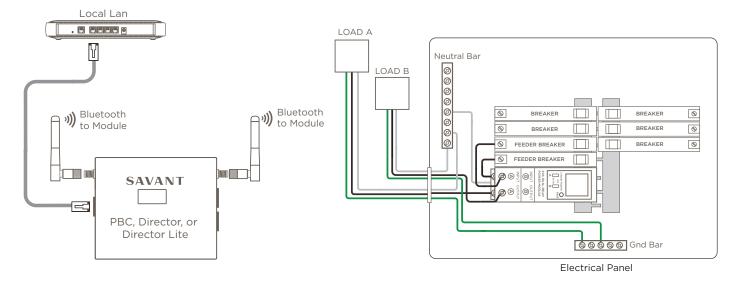


HELPFUL! The diagram shows an electrical panel that doesn't contain a plug-on neutral bus bar. However, both plug-on neutral and non plug-on neutral panels are supported

Wiring

The next few wiring diagrams cover a few basic installations. When making connections, observe all general electrical best practices including local wire sizing guidelines. See the **Branch Circuit Minimum Size of Conductors** table on the previous page.


Plug-on Neutral Panel with ARC Fault Breakers

Electrical panel with a plug-on neutral bus bar (with ARC Fault type feeder breakers).

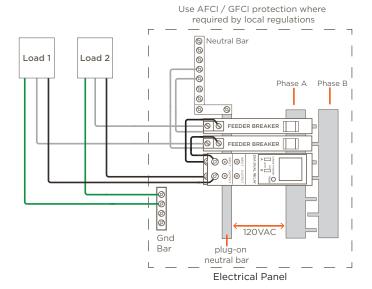


Plug-on Neutral Panel with Standard Breakers

Electrical panel with a plug-on neutral bus bar (with standard type feeder breakers).

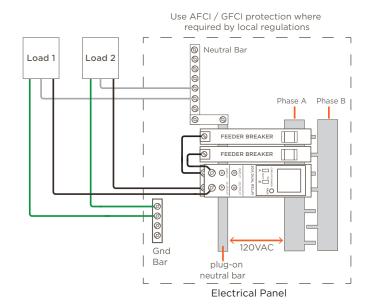


Non Plug-on Neutral Panel with ARC Fault Breakers

Electrical panel without a plug-on neutral bus bar (with ARC Fault type feeder breakers).

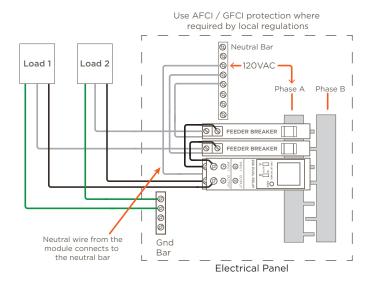

Non Plug-on Neutral Panel with Standard Breakers

Electrical panel without a plug-on neutral bus bar. (with standard type feeder breakers.

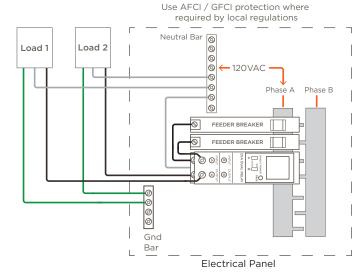

U HELPFUL!

- Modules with a pigtail neutral wire can be used in Plug-on neutral supported electrical panels. The electrician, however, must terminate the module's neutral wire to a neutral bar.
- A Class 2 Surge Protection Device is recommended when installing Savant's power or energy equipment in areas that experience
 frequent lightning or other transient voltage and current producing phenomena.

3

Circuit Test Instructions


Use the instructions below to test the power module. The setup requires:

- Dual 20 Amp Power Module.
- (2) loads (20 amps max for each).
- (2) 20 amp circuit breakers.
- Electrical test panel. The type of module determines the type of breaker panel (plug-on neutral or not).
- 120V AC source



IMPORTANT!

- When making connections, observe all general electrical best practices including local wire sizing guidelines.
- The GPM-QP2R20120-21 and GPM-Q2R20120-21 modules can accept up to a #12 AWG wire. See the Branch Circuit Minimum Size of Conductors table on the previous page for wire sizing information.
- 1. Plug the two feeder circuit breakers and one Dual 20 Amp Power Module into the electrical test panel.
- 2. Connect the output from one of the feeder circuit breakers to Input A on the module.
- 3. Connect the output from the remaining feeder circuit breaker to Input B on the module.
- 4. Connect a load to Output A.
- 5. Connect a second load to Output B.
- 6. Connect the neutral wire from each load to the neutral bus bar or arc fault breaker (when applicable).
- 7. On modules that contain a neutral wire, connect the neutral wire to the neutral bar.
- 8. Set the CIRCUIT POWER switches on the power module to AUTO.
- 9. Apply power to the panel (not shown in diagram).
- 10. Toggle the 20 amp feeder breakers to On.
- 11. To test, toggle the CIRCUIT POWER switches A and B to ON and verify both loads switch On. Toggle the CIRCUIT POWER switches to AUTO and verify the loads switch Off

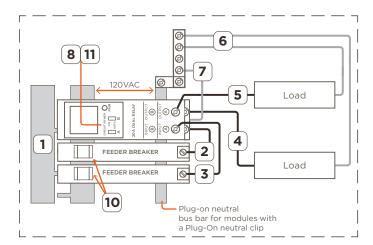

Additional Documentation

Further information is available in the documents listed below and can be accessed via the Savant Customer Community.

- Panel Bridge Controller with PoE (PBC-P1000) QRG
- Savant Panelized Lighting Deployment Guide
- Savant Power System Deployment Guide Power & Light App

NOTES