

## SmartLighting Enclosure Box (ENC-2000) Quick Reference Guide

The Savant SmartLighting grey enclosure box, ENC-2000, Quick Reference Guide provides installation information for the two-module enclosure box.

### Box Contents

- (1) Enclosure Box for 2 modules (ENC-2000-xx)
- (1) Quick Reference Guide (this document)

### System Accessories

Two-module Enclosure Surface Mount Lid (ENC-S2LID-xx)  
Two module Enclosure Recessed Mount Lid (ENC-R2LID-xx)  
Enclosure Diagnostic Bus Monitor (ENC-BM01-xx)  
Enclosure Ground Bar (ENC-GBAR-xx)  
Enclosure Neutral Bar (ENC-NBAR-xx)  
Enclosure Transorb Board (ENC-TRANS-xx)  
SmartLighting Modules

### Specifications

| Environmental                                |  |
|--|--|
| Temperature                                  | 32° to 95° F (0° to 35° C) - Ambient Operating |
| Two Module Enclosure - Dimensions and Weight |  |
| Height                                       | 20 in/50.80 cm                                 |
| Width  | 20 in/50.80 cm                                 |
| Depth  | 4.0 in/10.16 cm                                |
| Weight                                       | 3.68 lb/1.66 kg                                |
| Compliance                                   |  |
| Safety and Emissions                         | UL   ETL                                       |
| RoHS   | Compliant                                      |

### Enclosure Installation

Enclosures may be ordered for surface- or recess-mounting and can be mounted two or more units high. Each enclosure contains a barrier to isolate high voltage from low voltage.




**CAUTION:** Keep these wires on their respective side of the enclosure. Do not cross over or under the voltage barrier with wires.

### Recess- or Flush-Mount Enclosure (ENC-R2LID)

1. Mount enclosure to wall studs using screw holes located on the side panels of the enclosure.
2. Leave 3 inches minimum space between each enclosure to accommodate the recess/flush lids.
3. Install all enclosures before connecting the power.

### Surface Mount Enclosure (ENC-S2LID)

1. Mount enclosure to wall using screw holes located on the back panel of the enclosure.
2. Install all enclosures before connecting the power.

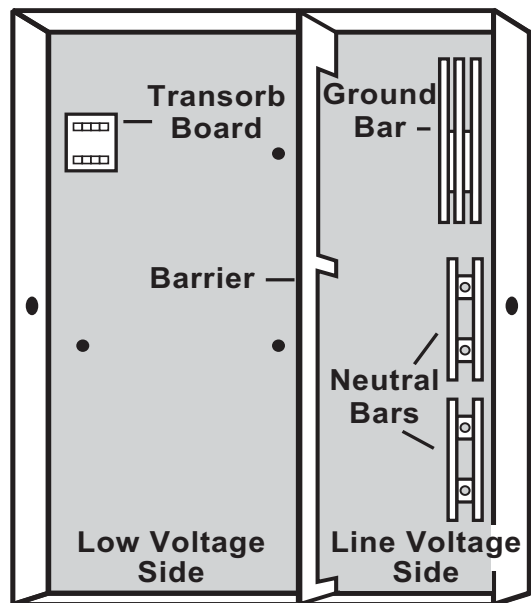

Two Module Enclosure

Copyright © 2012 Savant Systems, LLC. SAVANT and RacePoint Blueprint are trademarks of Savant Systems, LLC.

All brand names, product names and trademarks are the property of their respective owners.

Savant Systems, LLC reserves the right to change product specifications without notice.