


Recess 3" for Sloped Ceilings Warm Glow® Dimming Downlight

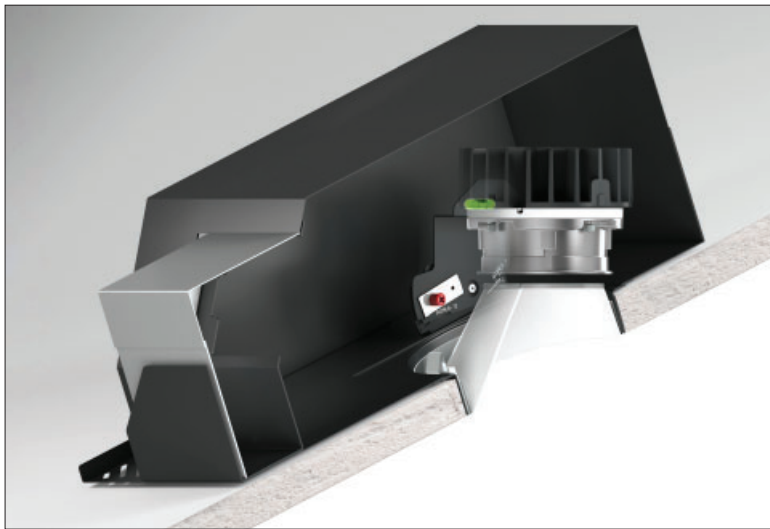

Recess 3 inch for Sloped Ceilings Warm Glow Dimming Downlight

An elegant solution for beautiful recessed lighting, that shifts to warm as you dim, for sloped ceiling installations up to 45 degrees. Featuring solutions for angles from 15° (3/12 pitch) to 45° (12/12) pitch to create a perfectly round or square roomside appearance to make every space look its best.

- **Ideal Applications:** Small to Medium-Scaled Spaces
- **Recommended for Ceiling Height:** 8' – 14'
- **Light Type:** White light that shifts to warm as you dim, indistinguishable from incandescent light.

3" DOWNLIGHT PERFORMANCE DATA

Warm Glow Dimming		
Shape	Round	Square
Delivered Lumens:	1000	1150
Lumens Per Watt:	50	58
Source Lumens:	1500	
Wattage	20W	
CCT:	3000K dimmable to 2200K	
CRI:	90+	
Beamspread:	40°	
	Medium Beam / Straight Down	

Round Trims




Square Trims




Universal and Field Convertible - Trim | Trimless | Millwork

4' SPACING BETWEEN LIGHT FIXTURES




4' x 4' LAYOUT	CEILING HEIGHT
Light levels at:	8' 10' 12' 14'
Light levels on Work Plane (2.5' AFF):	59 52 47 42 (fc) foot candles

5' SPACING BETWEEN LIGHT FIXTURES




5' x 5' LAYOUT	CEILING HEIGHT
Light levels at:	8' 10' 12' 14'
Light levels on Work Plane (2.5' AFF):	48 43 38 37 (fc) foot candles

6' SPACING BETWEEN LIGHT FIXTURES



6' x 6' LAYOUT	CEILING HEIGHT
Light levels at:	8' 10' 12' 14'
Light levels on Work Plane (2.5' AFF):	35 34 33 31 (fc) foot candles

8' SPACING BETWEEN LIGHT FIXTURES



8' x 8' LAYOUT	CEILING HEIGHT
Light levels at:	8' 10' 12' 14'
Light levels on Work Plane (2.5' AFF):	23 20 18 16 (fc) foot candles

Spacing Criteria
 15°-30° Sloped Ceiling: Round: 0.94 / Square: 0.78
 30°-45° Sloped Ceiling: Round: (0-180): 0.54, (90-270) 0.80 / Square: (0-180) .60, (90-270) 0.78

Average light levels are provided in the tables above, for a range of lighting fixture layouts and ceiling heights. All illuminance values are reported in average footcandles (fc) and measured at the workplane, 30" above the floor.

For approximate light level recommendations, please refer to the IES guidelines shown below:

- | | | |
|---|---------------------------|--|
| Workshop / Tools / Crafts: 40-100 fc | Kitchen: 30-50 fc | Reading: 20-50 fc |
| Board Games / Cards: 20-40 fc | Computer: 15-30 fc | Dressing: 10-30 fc |
| Dining: 5-10 fc | Media: 2-20 fc | Corridors / Circulation: 3-5 fc |




Recess 3" for Sloped Ceilings Warm Glow® Dimming Downlight






Seven Easy Steps to Specify

1 Select Ceiling Slope

For 15° (3/12) - 30° (7/12) Sloped Ceilings





For 30° (7/12) - 45° (12/12) Sloped Ceilings



2 Select Housing Type



For Ceilings without Insulation

New Construction Sloped Housing - NS

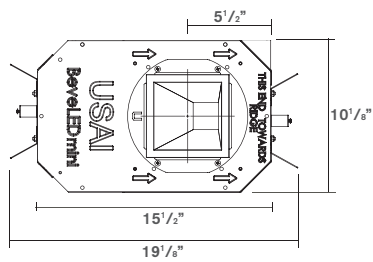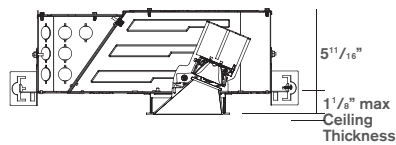

For Insulated Ceilings

New Construction / IC Rated Housing - (IS)
Rated for Direct Contact with Insulation

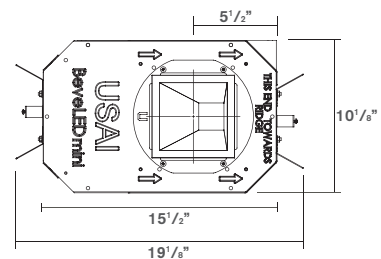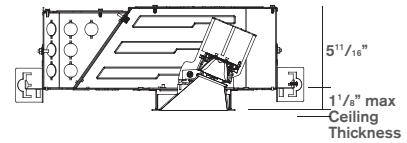

Recess 3" for Sloped Ceilings Warm Glow® Dimming Downlight


3 Select Dimming Control Type - Smooth Dimming to 1% Standard

0-10V Low Voltage Dimming
(IV20A)



Compatible with 0-10V Controls

Phased Line Voltage Dimming
(IP20A)



Compatible with Forward and Reverse Phase Dimmers

4 Select Shape

Square



Round



5 Select Trim Style For Ceiling Type

Trimmed (F)
for All Ceiling
Types



Trimless (P)
for Sheetrock Ceilings Only
(Must be Spackled In)




Millwork (M)
for Millwork and
Stone Ceilings



6 Select Glass Lens

Solite (S)
(provided standard)
Light diffusion
with the most
efficiency



Frosted (F)
Medium diffusion
for softer light
output, approximately
12% less light output



7 Select Trim Finish


White (WH)
(provided standard)



Black (BL)



Statuary
Bronze (BZ)



Metalized
Grey (GR)



Primer (PR)



See Next Page For How to Specify

Recess 3" for Sloped Ceilings Warm Glow® Dimming Downlight



How to Specify

Manufacturer	Light Fixture Type			LED + Control			Options				Revision
USAI	3DL			WD2				G			00
USAI	Family	Function	Housing Type	LED Color	Wattage Driver	Shape	Style	Beam Spread	Lens	Finish	Version
USAI Lighting	3DL 3" Downlight, 20W	S3 For 15°-30° Sloped Ceilings S5 For 30° -45° Sloped Ceilings	NS New Construction Sloped IS Insulation Contact Sloped	WD2 WD2 Warm Glow Dimming from 3000K, 90+ CRI at 100% output to 2200K at lowest output	IP20A Integral Phase Dimming Driver, to 1% 120V only, 20W IV20A Integral 0-10V Dimming Driver, to 1% 120V-277V, 20W	R Round S Square	F Trimmed P Trimless M Millwork	G 40° Beam	S Solite Textured Glass (provided standard) F Frosted Glass	WH White (provided standard) BL Black BZ Statuary Bronze GR Metalized Grey PR Primer	00

Recess 3" for Sloped Ceilings Warm Glow[®] Dimming Downlight

RECESS 3 SLOPED SPECIFICATIONS

FIELD REPLACEABLE LED LIGHT ENGINE

is serviceable through the aperture without tools. All USAI Lighting Warm Glow Dimming light engines feature industry leading color consistency.

FIELD REPLACEABLE DRIVER

Driver complies with IEEE62.41 surge protection. Multiple dimming driver options are available; some on-time delay may be experienced, depending on control system used.

ADJUSTMENT:

Sloped ceiling housings are fitted with an integral bubble leveling device to ensure perfectly level installations and optical alignment. Optical assembly can be tilted and locked in position for ceiling slopes from 3/12 pitch to 12/12 pitch, which are visually indicated on tilt mechanism. Butterfly brackets are imprinted with ceiling thickness indexing allow installers to easily preset housing prior to installation: choose from ceiling thicknesses of 1/2", 5/8", 3/4", 7/8", 1", or 1-1/8".

HOUSING:

Fabricated of 20 ga. galvanized steel with thru wire J-box, 4 in 4 out at min. 90°C, #12 AWG thru branch circuit wiring. IC-rated housings for use with 20W light engines only are rated for direct contact with insulation of R-42 or less.

MOUNTING:

Butterfly brackets and adjustable nailer bars with integral nails provided. Nailer bars are extendible from 16" to 24" centers.

CEILING CUT OUT:

Round Trimmed: 5-1/16"Ø

Round Trimless: 5-1/16"Ø

Round Millwork: 4-15/16"Ø

Square Trimmed: 5-1/16" X 5-1/16"

Square Trimless: 5-1/16" X 5-1/16"

Square Millwork: 4-15/16" X 4-15/16"

LISTINGS:

Dry/Damp/Wet location rated. NRTL/CSA-US tested to UL standards. IBEW union made.



NOTES:

- Not for use in corrosive environment.
- Use of pressure washer voids warranty.

PHOTOMETRICS:

Consult factory or website for IES files. Tested in accordance with IESNA LM79.